
NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

SUMMARY

Client Name	Pratichi behera
Requirement	2 BHK
Property Type	Flat
Property Age	New
Location	VTP Sierra, Sus
Quotation by	Aishwarya Khinvasara
Date	9/11/2026

Project Cost Distrubution


[A] Furniture Works Costs

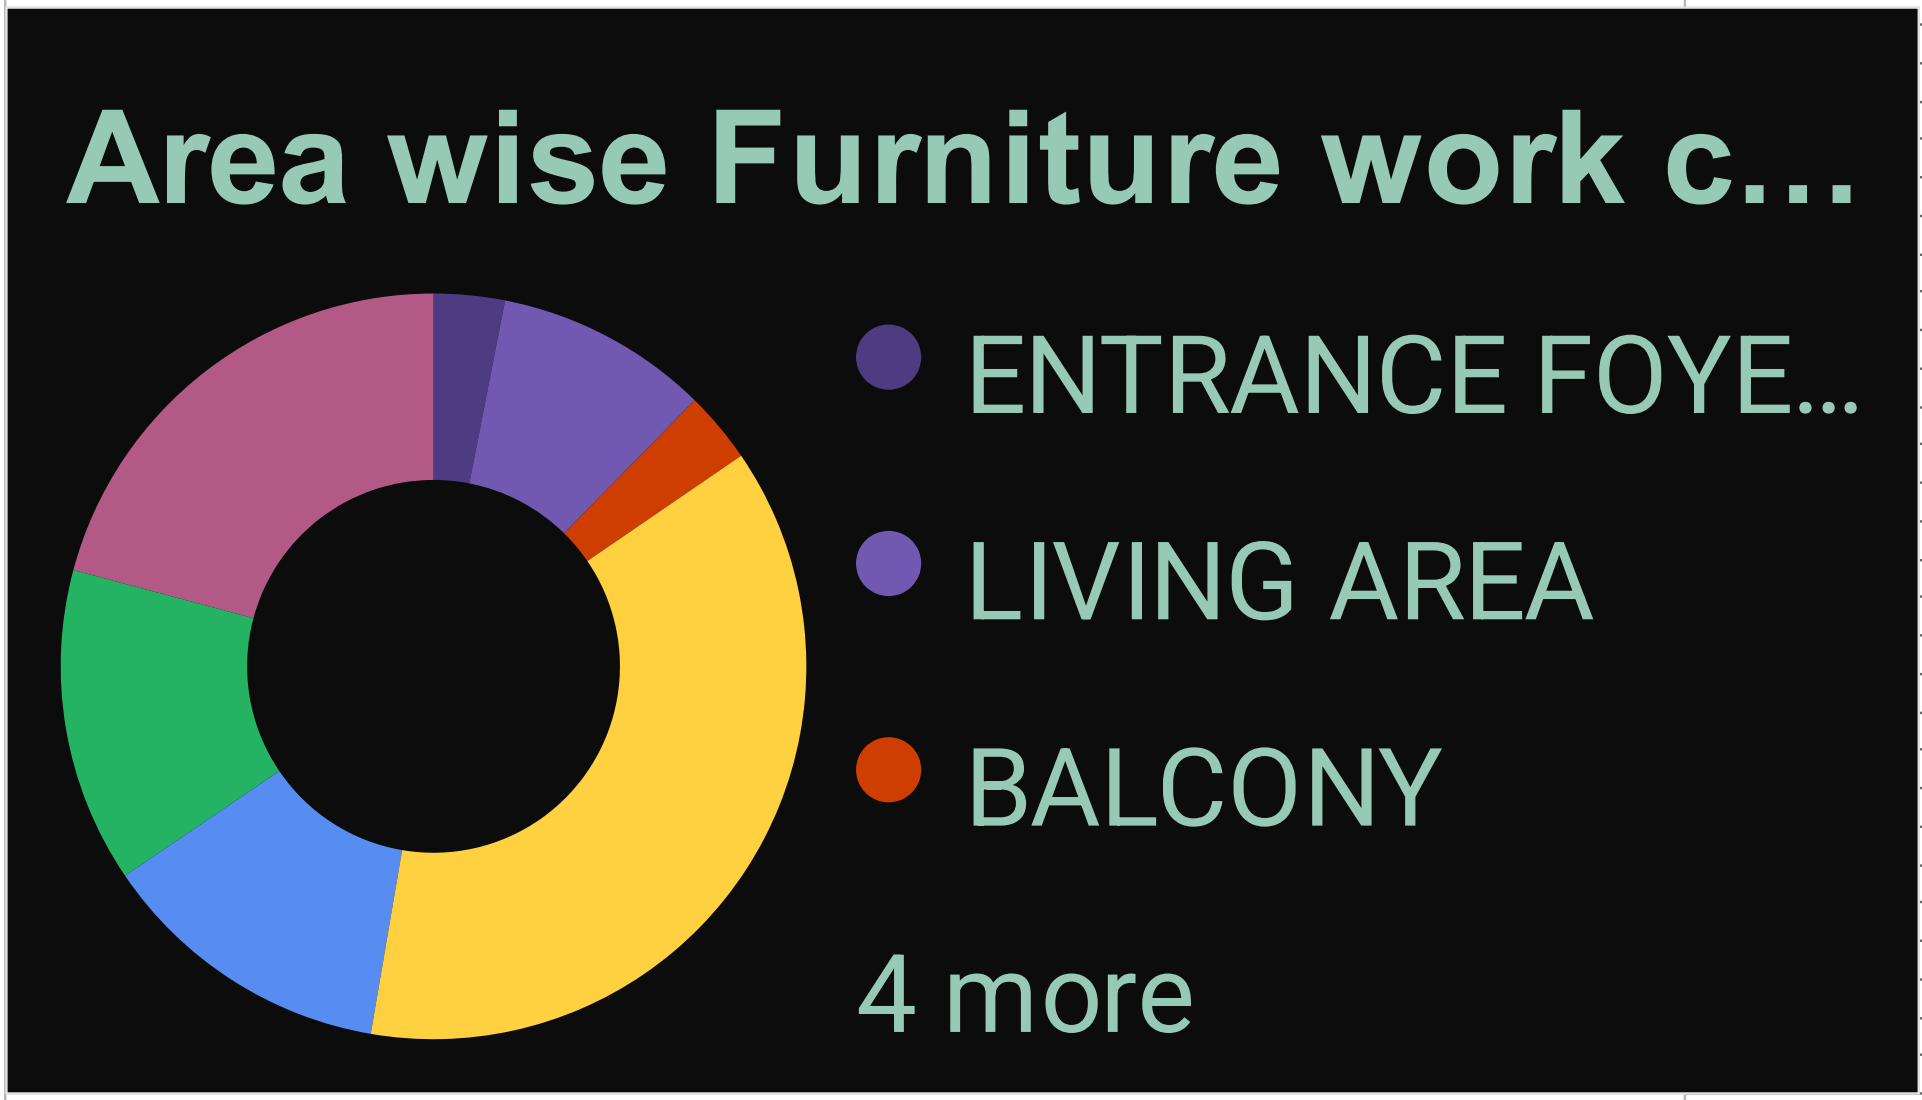

Area/Room	Cost
ENTRANCE FOYER AREA	₹ 40,200
LIVING AREA	₹ 121,200
BALCONY	₹ 40,500
KITCHEN	₹ 486,800
FIRST GUEST BEDROOM	₹ 167,500
SECOND KIDS BEDROOM	₹ 178,380
BATHROOM (COMMON ROOM)	₹ 0
THIRD MASTER BEDROOM	₹ 272,440
* *Actual cost of all items above may change as per actuals*	
Furniture Works Total	**₹ 1,307,020**

[B] Other Works Cost



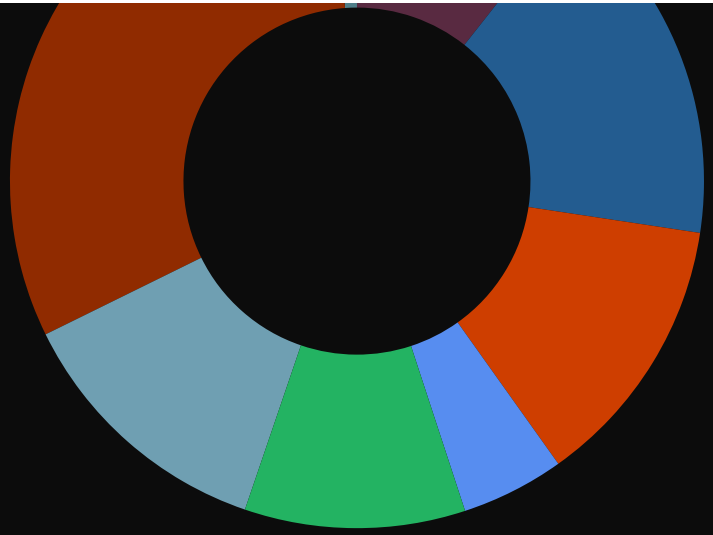

Item	Cost
FALSE CEILING WORK	₹ 77,378
PAINTING & WALL FINISHES	₹ 122,000
ELECTRICAL WORK	₹ 92,900
AIR- CONDITIONING WORK	₹ 0
PLUMBING WORK	₹ 35,000
CIVIL WORK	₹ 74,800
FABRICATION WORK	₹ 0

FABRICS AND STICHING	₹ 90,900	
BOUGHT OUT ITEMS (subject to selection)	₹ 227,000	
MISCELLANEOUS ITEMS (subject to selection)	₹ 8,000	
* *Actual cost of all items above may change as per actuals*		
Other Works Total	**₹ 727,978**	
Total Project Cost		
[A] Furnitue Works Total	₹ 1,307,020	
[B] Other Works Total	₹ 727,978	
[C] Project Cost (A + B)	**₹ 2,034,998**	
[D] Contingencies (5% of Project Cost)	₹ 101,750	
[E] Total Project Cost (C + D)	**₹ 2,136,748**	
Interior Design Fees		
LUMPSUM		
[G] Interior Design Fees	**₹ 225,000**	
Final Project Cost		

TOTAL PROJECT COST + INTERIOR DESI	₹ 2,361,748	

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

DETAILED ESTIMATE

S.NO	ITEM	PROPOSED DETAILS/MATERIALS	LENGTH	BREADTH	NOS.	QUANTITY (APPROX)	UNITS	RATE	GRAND TOTAL
A									**ENTRANCE FOYER AREA**
1	SAFTEY DOOR	a)Safety Door with Metal Grill and Godgrej Lock	7.5	3	1	22.5	sq.ft	₹ 1,850.00	NA
2	MAIN DOOR	a) flush door saftey door.(Finish - Matt finish) (Open style - Hinged/Swing/Sliding) handles and b)locks cost subject to selection as per desgin	7.3	3.6	1	26.28	sq.ft	₹ 1,800.00	NA
3	ENTRANCE DESIGNER PANEL	a) name plate with paneling of plywood	7	9	1	72	sq.ft	₹ 800.00	NA
4	SHOE RACK	a) plywood shoe rack with laminate finish.	4	4	1	16	sq.ft	₹ 2,200.00	₹ 35,200.00
6	NAME PLATE	a) name plate with paneling of plywood	2	2	1	4	sq.ft	LUMPSUM	₹ 5,000.00
6	FOYER WALL WITH PANELING	paneling of plywood	4.5	6	1	27	sq.ft	₹ 800.00	NA
								TOTAL OF ENTRANCE FOYER AREA	*₹ 40,200.00*
B	**LIVING AREA**								
1	TV UNIT DESIGNER PANELLING	Left Size Wall Panel with shelves a) Providing & making of 2" thk paneling.Framework and 8mm thk . ply treated with **LAMINATE AND WALL PAPER**	5	9	1	45	sq.ft	₹ 1,000.00	₹ 45,000.00
2	BOOK SHELF	b) 18mm plywood With Dark Walnut laminate with 2 drawers	7	5	1	35	sq.ft	₹ 1,800.00	NA
3	TV UNIT LEDGE	b) 18mm plywood With Dark Walnut laminate with 2 drawers	5	1.8	1	9	sq.ft	₹ 1,800.00	₹ 16,200.00
4	DINING TABLE	a) Material - plywood	6	4	1	24	sq.ft	₹ 1,800.00	₹ 43,200.00
5	DESIGNER PANELLING	Sofa Back Wall Panelling with Wall Light	4	9	1	36	sq.ft	₹ 900.00	NA
5	DESIGNER PANELLING	Sofa Back Wall - Moulding integrated in pop	3	7	1	21	sq.ft	₹ 800.00	₹ 16,800.00
6	AC PANELLING	a) Providing designer wall	3	18.6	1	37.2	sq.ft	₹ 900.00	NA
7	STORAGE ON DINING	b) 18mm plywood With Dark Walnut laminate	3	5	1	10	sq.ft	₹ 1,800.00	NA
8	MANDIR	a) Providing and making a fluted glass mandir	3	4	1	12	sq.ft	₹ 2,100.00	₹ 25,200.00
								TOTAL OF LIVING AREA	*₹ 131,200.00*
C	**BALCONY**								
1	DESIGNER PANELLING	Designer dado tiles with fitting	5	9	1	45	sq.ft	₹ 900.00	₹ 40,500.00
2	SEATING/SWING	a)granite top	3	5	1	10	sq.ft	₹ 2,100.00	NA
3	JANITER STORAGE	b) 18mm plywood With Dark Walnut laminate	1	7	1	7	sq.ft	₹ 1,800.00	NA
4	OUTDOOR CHAIR AND	2 Chairs and table				1		₹ 15,000.00	NA
								TOTAL OF BALCONY AREA	*₹ 40,500.00*
D	**KITCHEN**								

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

DETAILED ESTIMATE

S.NO	ITEM	PROPOSED DETAILS/MATERIALS	LENGTH	BREADTH	NOS.	QUANTITY (APPROX)	UNITS	RATE	GRAND TOTAL
1	KITCHEN TANDOMS	a) Pre laminated HDHMR/ BWR plywood	12	2	1	26	sq ft	₹ 6,000.00	₹ 216,000.00
1	KITCHEN SHUTTERS	a) Pre laminated HDHMR/ BWR plywood with	6	2	1	18	sq ft	₹ 3,500.00	₹ 63,000.00
2	Over Counter Around	a) Providing and making a over head Storage	18	2	1	36	sq ft	₹ 2,100.00	₹ 75,600.00
3	LOFT STORAGE	a) Providing and making a over head Storage	18	2	1	36	sq ft	₹ 1,800.00	₹ 64,800.00
4	APPLIANCESTORAGE /	a) HDHMR / bwp with laminate. Providing and	2	5	1	10	sq ft	₹ 2,500.00	₹ 25,000.00
5	BREAKFAST COUNTER	a) HDHMR / bwp with laminate. Providing and	4	4	1	16	sq ft	₹ 2,200.00	NA
5	KITCHEN PANTRY	a) HDHMR / bwp with laminate. Providing and	1.5	7	1	10.5	sq ft	₹ 4,500.00	NA
6	DRY BALCONY STORAGE	a) WPC dry balcony storage	2	2	2	18	sq ft	₹ 1,800.00	₹ 32,400.00
7	SLIDING DOOR	a) Providing & making kitchen sliding door	7	4	1	28	sq ft	₹ 1,800.00	NA
8	PARTITION	a) Providing & making of kitchen 6" thk partition	7	3	1	21	sq ft	₹ 1,200.00	NA
								TOTAL OF KITCHEN AREA	₹ 486,800.00
F	FIRST GUEST BEDROOM								
1	BED	"18mm plywood bed with hydraulic storage	5	6	1	30	sq ft	₹ 1,450.00	₹ 43,500.00
2	BED/CUSIONED	a) KDAR Headboard cusion backrest	2	6	1	18	sq ft	₹ 800.00	₹ 14,400.00
2	BEDBACK WALL PANEL	Bed Back Wall Paneling	11	7	1	77	sq ft	₹ 700.00	NA
3	WARDROBE	a) Providing & making of wardrobe with cane	6	9.5	1	57	sq ft	₹ 1,800.00	₹ 102,600.00
4	SIDE TABLE (WITH	a) Table with plywood	1	1.6	2	3	no.s	₹ 2,500.00	₹ 7,000.00
4	STUDY TABLE WITH ONLY	a) Table with plywood	5	2.6	1	13	sq ft	₹ 1,800.00	NA
5	BOOK SHELF	b) 18mm plywood With Dark Walnut laminate	4	4	1	16	sq ft	₹ 1,800.00	NA
6	WALLPAPER/TEXTURE	Bought out item	8	5	1	40	sq ft	₹ 200.00	NA
7	WINDOW SEATING	b) 18mm plywood With Dark Walnut laminate	7	3	1	21	sq ft	₹ 1,800.00	NA
8	TV UNIT	a) Providing and making a TV unit made out of	6	9	1	54	sq ft	₹ 800.00	NA
9	DRESSING TABLE WITH	b) Exotic Teak Finish made of premium	4.6	2	1	9.2	sq ft	₹ 1,800.00	NA
10	BEDROOM DOOR	a) Providing & making door made of 10 mm thk	7	3	1	21	sq ft	₹ 1,800.00	NA
11	DOOR FRAME	a) Providing & Making of bedroom door frame	7	3	1	21	sq ft	₹ 600.00	NA
12	AC PANELLING	b) Providing & making of 2" thk panelling	3	10.3	1	30.6	sq ft	₹ 800.00	NA
								TOTAL OF FIRST BEDROOM	₹ 167,500.00
F	SECOND KIDS BEDROOM								
1	BED	"18mm plywood bed with hydraulic storage	5	6	1	30	sq ft	₹ 1,450.00	₹ 43,500.00
2	BED/CUSIONED	a) KDAR Headboard cusion backrest	2	6	1	18	sq ft	₹ 800.00	₹ 14,400.00
2	BEDBACK WALL PANEL	Bed Back Wall Paneling	11	7	1	77	sq ft	₹ 700.00	NA
4	WARDROBE	a) Providing & making of wardrobe with cane	6	9.5	1	57	sq ft	₹ 1,800.00	₹ 102,600.00
5	SIDE TABLE (WITH	a) Table with plywood	1	1.6	2	3	no.s	₹ 2,500.00	₹ 7,000.00
6	STUDY TABLE WITH ONLY	a) Table with plywood	2	2.6	1	5.2	sq ft	₹ 1,400.00	₹ 7,280.00
7	DRESSING TABLE WITH	b) Exotic Teak Finish made of premium	9	3	1	27	sq ft	₹ 1,200.00	NA
8	WHITE BOARD	Back painted glass	2	6	1	12	sq ft	₹ 200.00	₹ 2,600.00
9	FOLDABLE TABLE	a) Table with plywood	2	3	1	6	sq ft	₹ 1,800.00	NA
								TOTAL OF SECOND BEDROOM	₹ 178,380.00
G	BATHROOM (COMMON ROOM)								
1	BATHROOM FLUSH DOOR	a) Providing & making bathroom door of 35mm	7	3	1	21	sq ft	₹ 900.00	NA
2	BATHROOM FLUSH DOOR	a) Providing & Making of bathroom door frame	7	3	1	21	sq ft	₹ 500.00	NA
3	BELOW BASIN COUNTER	Installing Below basin counter storage crafted	3	2	2	12	sq ft	₹ 1,800.00	NA
3	ABOVE WC COUNTER	Installing Below basin counter storage crafted	3	4	1	12	sq ft	₹ 1,800.00	NA
								TOTAL OF BATHROOM	₹ 0.00
H	THIRD MASTER BEDROOM								
1	BED	"18mm plywood bed with hydraulic storage	6	5.6	1	33.6	sq ft	₹ 1,450.00	₹ 48,720.00
2	BED/CUSIONED	a) KDAR Headboard cusion backrest	3	12	1	36	sq ft	₹ 800.00	₹ 28,800.00
3	BEDBACK WALL PANEL	Bed Back Wall Paneling	6	12	1	72	sq ft	₹ 700.00	NA
4	WARDROBE	a) Providing & making of wardrobe with cane	7	9	1	63	sq ft	₹ 1,800.00	₹ 113,400.00
5	SIDE TABLE (WITH	a) Table with plywood	1	1.6	2	3	no.s	₹ 2,500.00	₹ 7,000.00
6	STUDY TABLE WITH ONLY	a) Table with plywood	4	2.6	1	10.4	sq ft	₹ 1,800.00	₹ 18,720.00
7	DRESSING TABLE WITH	b) Exotic Teak Finish made of premium	7	3	1	21	sq ft	₹ 1,800.00	₹ 37,800.00
8	STORAGE ABOVE STUDY	a) Providing & making of o.h storage above	2	4	1	8	sq ft	₹ 1,800.00	₹ 14,400.00
								TOTAL OF THIRD BEDROOM	₹ 273,440.00
								TOTAL OF FURNITURE WORK (All the above items from Sr. No. A to I)	₹ 1,207,020.00
A	FALSE CEILING WORK								
1	FALSE CEILING (GYPSUM)	FIRST BEDROOM	11	11.5	1	126.5	sq ft	₹ 80.00	₹ 10,120.00

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

DETAILED ESTIMATE

S.NO	ITEM	PROPOSED DETAILS/MATERIALS	LENGTH	BREADTH	NOS.	QUANTITY (APPROX)	UNITS	RATE	GRAND TOTAL
		KIDS BEDROOM	11	11.5	1	126.5	sq ft	₹ 80.00	₹ 10,120.00
		MASTER BEDROOM	11	12	1	132	sq ft	₹ 80.00	₹ 10,560.00
		LIVING ROOM	17.5	14.5	1	253.75	sq ft	₹ 80.00	₹ 20,300.00
		DINING AREA	12.3	5	1	61.5	sq ft	₹ 80.00	₹ 4,920.00
		KITCHEN	9	9.3	1	83.7	sq ft	₹ 80.00	₹ 6,696.00
		LOBBY	5	4	1	20	sq ft	₹ 80.00	₹ 1,600.00
		PASSAGE	4	6	1	24	sq ft	₹ 80.00	₹ 1,920.00
2	FALSE CEILING (ACRELIC/	BALCONY	6	14	1	84	sq ft	₹ 250.00	NA
		BALCONY	3	14	1	42	sq ft	₹ 250.00	NA
		ALL BATHROOMS	8	4	3	96	sq ft	₹ 200.00	NA
3	WOODEN ELEMENTS	BORDERS	1	8	8	64	sq ft	₹ 200.00	NA
3	VERTICAL CEILING	COVE CEILING	1	73.8	1	73.8	sq ft	₹ 80.00	₹ 6,642.00
4	CALA CUTTING	LIGHT CUTTING	1	50	1	50	sq ft	₹ 80.00	₹ 4,500.00
								TOTAL OF FALSE CEILING WORK	₹ 77,278.00
B	PAINTING & WALL FINISHES								
1	PA PLASTIC PAINT	a) PA Plastic paint in three coat with necessary				2500	sq ft	₹ 38.00	₹ 95,000.00
2	PA VELVET PAINT	a) PA velvet paint in three coat with necessary							NA
3	MICRO TOPPING	a) Micro topping							NA
4	LIVING AREA	a) Living area - curved partition							NA
5	WALL PAPER	a) Decorative wall paper:							NA
		b) Decorative wall paper dining area kitchen							NA
6	POLISH	a) Monocoat polish - 0" to 6"							NA
7	laminate POLISH	a) Monocoat polish - laminate							₹ 12,000.00
8	COATING	a) PUCO - PU Coating							₹ 6,000.00
9	LAMINATION	a) COLOR LAMINATION							NA
10	POLISHING	a) Polishing Groove, kappi							NA
11	INTERIOR DEEP	a) Housekeeping & Full home Deep cleaning				1	lumpsum	₹ 0,000.00	₹ 0,000.00
		Note : Cost of painting & polishing, kappi groove, pu, Color lamination work quan shall vary as per actual quantity need to check measurement sheets with the							
								TOTAL OF PAINTING	₹ 113,000.00
C	ELECTRICAL WORK								
1	ELECTRIC POINT	40ceiling light point - 20 sb shifting, 6 fan point				80	no.s	₹ 950.00	₹ 76,000.00
		(Electrical job will be billed as per actuals)							NA
		led lights				20	rm	₹ 370.00	₹ 7,400.00
2	PUMP POINT	a) for pressure pump - FRAPA/ALIANT 2M					no.s		NA
4	GEYSER POINT	a) for geyser - FRAPA/ALIANT 2M							NA
5	FILTRATION POINT	a) for water filtration - if any							NA
7	APPLIANCE POINT	removing point for appliances (Geysers, exaust				5	no.s	₹ 900.00	₹ 4,500.00
6	DECORATIVE LIGHTS	a) decorative lights (Bought subject to					lump sum		NA
		b) decorative lights (installation)				5	lump sum	₹ 1,000.00	₹ 5,000.00
		Cost of Electrical Fixture shall vary as per							
								TOTAL OF ELECTRICAL WORK (WILL DIFFER AS PER ACTUALS)	₹ 92,900.00
D	AIR CONDITIONING WORK								
1	AIRCONDITIONING	a) AIRCONDITIONING PIPE				2	AC	lump	NA
		Cost of air conditioning need to cross check							
								TOTAL OF AIR CONDITIONING WORK	₹ 0.00
E	PLUMBING WORK								
1	PLUMBING	a) PLUMBING WORK							₹ 25,000.00
		as per actuals							
		All the work on laying pipes & fixing of body kit							
								TOTAL OF PLUMBING WORK (WILL DIFFER AS PER ACTUALS)	₹ 25,000.00
F	CIVIL WORK								
1	DEMOLITION								
		BREAKING OF KITCHEN WALL							NA
		BREAKING OF EXISTING KITCHEN	17	2	1	34	SQFT	₹ 600.00	NA
		BREAKING OF EXISTING KITCHEN DADO	17	2	1	34	SQFT	₹ 600.00	NA
	BATHROOM	BREAKING AND MAKING	4	4	3	32	SQFT	₹ 400.00	NA
2	PROPOSING								NA
B	DADO TILES								NA
C	KITCHEN COUNTER TOP	*STONE COST 250*	17	2	1	34	SQFT	₹ 2,200.00	₹ 74,800.00
	KITCHEN DADO	AVG COST OF TILE -80.00RS PER SQFT	17	2	1	34	SQFT	₹ 400.00	NA

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

DETAILED ESTIMATE

S.NO	ITEM	PROPOSED DETAILS/MATERIALS	LENGTH	BREADTH	NOS.	QUANTITY (APPROX)	UNITS	RATE	GRAND TOTAL
		All the work on laying pipes & fixing of body kit							NA
								TOTAL OF CIVIL WORK(WILL DIFFER AS PER ACTUALS)	₹ 74,800.00
F	FABRICATION WORK								
1	FABRICATION	A\INVISIBLE GRILL APPROX COST							NA
		B\ INVERTOR BRACKET							NA
		C\ AC OUTDOOR UNIT BRACKET							NA
		D\FABRICATED SHADE IN TERRACE							NA
		E\WINDOW NET							NA
		F\FRENCH DOOR IN BALCONY							NA
		Cost of metal fabrication need to cross check							
								TOTAL OF METAL FABRICATION WORK	₹ 0.00
G	FABRICS AND STICHING								
	A	Main curtains for all areas:							
		Living area				10	M	₹ 800.00	₹ 15,200.00
		study room				15	M	₹ 700.00	₹ 10,500.00
		second bedroom				15	M	₹ 700.00	₹ 10,500.00
		master bedroom				15	M	₹ 700.00	₹ 10,500.00
	B	Sheer curtains for all areas:							
		Living area				10	M	₹ 300.00	₹ 5,700.00
		study room				15	M	₹ 300.00	₹ 4,500.00
		second bedroom				15	M	₹ 300.00	₹ 4,500.00
		master bedroom				15	M	₹ 300.00	₹ 4,500.00
	C	TRACKS AND STICHING							₹ 25,000.00
		Cost of ITEM need to cross check with							
								TOTAL OF FABRICS AND STICHING	₹ 80,000.00
G	BOUGHT OUT ITEMS (subject to selection)								
1	DINING BENCH	Bought out item	4	2	1	4	no.s	₹ 7,000.00	₹ 28,000.00
2	LOUNGE SOFA	Bought out item	7	1	1	7	no.s	₹ 6,000.00	₹ 42,000.00
3	ACCENT CHAIR	Bought out item	1	1	1	1	no.s	₹ 20,000.00	₹ 20,000.00
4	CENTRE TABLE	Bought out item	1	1	1	1	no.s	₹ 20,000.00	₹ 20,000.00
4	STUDY CHAIR	Bought out item	1	1	1	1	no.s	₹ 20,000.00	₹ 20,000.00
4	MATRESS	Bought out item	1	1	3	3	no.s	₹ 15,000.00	₹ 45,000.00
5	OUTDOOR SEATING/	a\granite top	3	5	1	10	sq.ft	₹ 2,400.00	NA
6	OUTDOOR CHAIR AND	2 Chairs and table				1	sq.ft	₹ 15,000.00	NA
7	PARENT SEATING CHAIRS		1	1	2	2	sq.ft	₹ 8,000.00	NA
8	ELECTRIC FIXTURES	tube lights, spot lights, fans				40	no.s	₹ 800.00	₹ 32,000.00
9	KITCHEN SINK AND						no.s		₹ 20,000.00
								TOTAL OF BOUGHT OUT ITEMS	₹ 227,000.00
G	MISCELLANEOUS ITEMS (subject to selection)								
1	FLOOR SHEET	Floor protection sheet 2mm				1000	sq.ft	₹ 8.00	₹ 8,000.00
2	APPLIANCE	APPLIANCES like otg microwave refrigerator							NA
3	BATHROOM	Bathroom gp, Fittings (toilet holder shaving					sq.ft		NA
4	HARDWARES	Hardware & accessories					sq.ft		NA
5	SECURITY	Quotation for cctv dvr system with labour					sq.ft		NA
6	INTERNET WIFI	Quotation for wifi/switch system video call video					sq.ft		NA
7	SOUND SYSTEM	Quotation for speaker & system , in ceiling area					sq.ft		NA
8	LANDSCAPE	Planters & plant					sq.ft		NA
9	STYLING	Beddings and cushions							NA
10	PAINTINGS	Art							NA
								TOTAL OF MISCELLANEOUS ITEMS	₹ 8,000.00
								SUB TOTAL	₹ 2,024,008.00
								5% Contingencies	₹ 101,740.00
								TOTAL PROJECT COST (WITHOUT TAXES)	₹ 2,126,747.00

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

DETAILED ESTIMATE

S.NO	ITEM	PROPOSED DETAILS/MATERIALS	UNITS	GRAND TOTAL

Interior Designer Fees

Scope of Work:

To provide 2d, 3d to client.
To provide working drawings .
To go for selection of materials(laminate veneer tiles décor all finishing materials) with client .
To do site visits and update client as and when required.
To Maintain Best Quality of work.
Giving Material orders, making list of it and its procurement.
Optimum material use and lesser wastage.
Provide Labour Teams; get the work done as per the drawings.
Rates and bill checking of material and labour.
Interlinking and coordination between agencies for speedy work.
To direct and maintain speed of work.

	Description	Percentage	TOTAL PROJECT COST	DESIGNER FEES
	Designing Charges (2d drawings 3d drawings , working drawings , site visits, selection of each item needed.			
			TOTAL AMOUNT /-	₹ 225,000.00

Interior design fees to be paid in 4 phases as follows:

Phase	Description	Rate(Rs)	AMOUNT(Rs)
1	Advance at signing designing fees	45%	₹ 101,250.00
2	Design phase 1 (AFTER SELECTION)	25%	₹ 56,250.00
3	Design phase 2 (AFTER START OF PROJECT)	20%	₹ 45,000.00
4	Design phase 3 (AFTER HANDOVER)	10%	₹ 22,500.00
5	Designing Charges (2d drawings 3d drawings , working drawings , site visits, selection of e	₹ 225,000.00	₹ 225,000.00
		TOTAL AMOUNT (LUMSUM)	₹ 225,000.00

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*				
DETAILED ESTIMATE				
S.NO	***ITEM***	***PROPOSED DETAILS/MATERIALS***	***UNITS***	***GRAND TOTAL***
		FINAL PROJECT COST (TOTAL PROJECT COST + INTERIOR DESIGN FEES)		₹ 225,000.00

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

MATERIAL SPECIFICATIONS AND PAYMENTS T&C

ALL FURNITURE WORK WILL BE DONE IN

1	18mm, 12mm, 6mm ply 8x4 sheet. Sliding door will be in 25mm thick blockboard
2	Laminate will be in 1 mm thick (inside-colour , outside-colour laminate)
3	Hardware, Nails , screws, Adhesives

BRANDS CONSIDERED

1	Ply	Basic furniture structure in high quality alternate grade plywood full face gurjan, ISO,ISI grade (Water resistance)
2	Laminate	Royal Touch, Real Touch, Merino equivalent brands
3	Laminate Finishes	Wood grain shine, wood grain solid, anti fingerprints, HD Gloss, Super Gloss, Textures, Scratch Resistant, PVC laminate etc
4	Glass/Mirror	Plain 6mm
5	Sliding Track	EBCO (soft closing) Premium
6	Adhesives	Falco fix ultramarine and Falco fix EBS
7	Paint	Asian, equivalent (Ceiling- luxury emulsion)
8	POP	6x4 sheets, 12MM thickness, Brand Saint Gobain-Gyproc. Gypsum sheet with aluminium metal frame by Ultra
9	Electrical Cables	Polycab standard
10	Light Panels	Polycab 12w
11	Kitchen Ply	Waterproof, BWP
12	Kitchen Hardware	EBCO soft closing hinges, Hydraulic pump, Auto hinges
13	Kitchen Finish	Acrylic, back painted, water resistant
14	Locks	Godrej/Europa/Yale/Quba
15	Curtains	D'Decor or EnE

NESTURA DESIGNS *(formerly SA INTERIOR SCAPES)*

MATERIAL SPECIFICATIONS AND PAYMENTS T&C

PAYMENT TERMS FOR EXECUTION

1	40% before the structural work start on site, after the finalization of 3D designs
2	30% At the start of the carpentry stage
3	20% At the start of wall painting
4	10%At the start of furnishings(Before site handover (before Sofa And dinning installation)

GENERAL NOTES (T&C)

The above mentioned unit rates are subject to the following conditions

1	The unit rate for any of the above items are considered as per standard of MRg material as per
2	Marine ply used in kitchen & toilet only, rest of all furnitures are to be made from BWR ply
3	Every room door & toilet doors has been considered with a pair of mortise hand set. Any variation
4	Every room Storages has been considered with a handle upto Rs. 200/- piece. Any cost shall be

GENERAL NOTES

1	The above unit rates are valid for 60 days from the date of the Bill of Quantities (BOQ). These
2	The quantities mentioned in the BOQ are for estimation purposes only. The BOQ is subject to
3	The electrical costs mentioned are approximate and will be charged based on actual costs
4	RMC and society permissions required for the job will be obtained by the owner. The contractor
5	Final billing will be based on actual quantities executed, and a measurement sheet will be
6	The submitted rates are unit rates, and it is assumed that these rates are agreed upon by the
7	The contractor will submit an estimate for any unforeseen costs incurred during the project. Such
8	Water and electricity will be provided free of charge by the client
9	Plywood material uplifting will be charged as per actuals, based on the number of floors
10	Electrical fittings, such as hanging and decorative lights, fans, TV cables, Wi-Fi routers, CCTV
11	Electronics, such as air conditioners, chimneys, fridges, TVs, etc., must be provided by the client
12	There will be no refund on the initial payment if the client cancels the deal
13	Please be advised that, while we implement floor protection measures (such as floor guards)

THANK YOU!